

Series


OTH2750P Programmable Electronic Thermostat



CSA-C828-06 Performance Standard

Features

Type	- Programmable electronic proportional pulsing line voltage thermostat.
Color	- Standard: white.
Voltage	- 120/208/240V, 50/60 Hz.
Rating	- Maximum load: 11.5A at 120/208/240V.
	- Minimum load: 1.25A at 120/208/240V.
Control	- 10-minute or 15-minute cycle.
	- Resolution: ± 0.5 °C (1 °F).
	- Precision: ± 0.15 °C (0.27 °F) on 15-second cycle.
	- Precision: ± 0.5 °C (0.1 °F) on 10-minute cycle.
Temperature range	- 5 °C (41 °F) to 30 °C (86 °F).
Display	- Digital screen with white LED backlit.
	- Display ambient temperature and setpoint temperature, day and hour, heating level indicator, program period and number of the program period (in continuous). Display mode (Freeze, Man, Auto, Econo), fan-forced heater mode and keypad lock (when activated).
Program	- Programming available for 5+2 days or 7 days and up to 4 periods a day.
Mode	- Automatic, Manual, Economy, Freeze, Standby.
Other feature	- Choice of temperature display format (°C or °F) and time format (24h or 12h).
	- Automatic daylight saving time switches.
	- Early start of the heating period (in automatic mode only).
	- Temperature setpoints recorded permanently in case of a power outage.
	- 8h of memory for the date and hours in case of a power outage.
	- Ability to set minimum and maximum setpoints.
	- Night light mode for the display LED.
Installation	- 2-wire thermostat, easy to install.
Application	- Baseboard heater, radiant ceiling, radiant floor (without floor sensor), convactor (short cycle) and fan-forced convactor (long cycle)
Warranty	- 3-year warranty against defects.

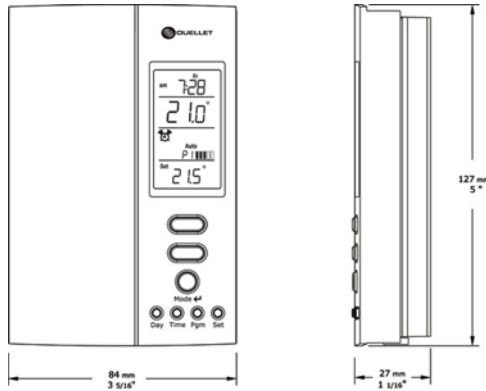

Model

Product #	Description	Volts	Watts	Qty
OTH2750P	Programmable electronic proportional pulsing line thermostat	120/208/240	1380/2390/2750	

Standard color is white.

Specifications may change without prior notice

Project:	Approval Information
Consultant Engineer:	
Electrician Contractor:	
Distributor:	
Date:	
Contact in Indeeco:	
Comments:	