


Series

OTH5007

Non Programmable Electronic Thermostat

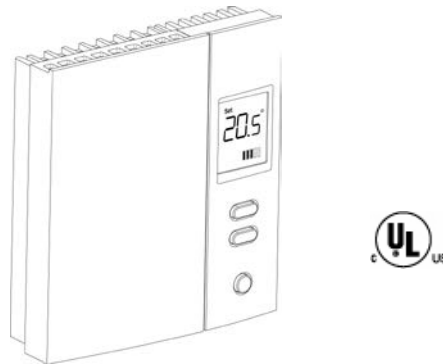

Features

| | |
|-------------------|--|
| Type | - Non programmable electronic proportional pulsing thermostat. |
| Color | - Standard: white. |
| Voltage | - 277/347V, 50/60 Hz. |
| Rating | - Maximum load: 14.4A at 277/347V. - Minimum load: 1.25A at 277/347V. |
| Control | - 10-minute or 15-second cycle. - Resolution: ± 0.5 °C (1 °F). - Precision: ± 0.15 °C (0.27 °F) on 15-second cycle. - Precision: ± 0.5 °C (1 °F) on 10-minute cycle. |
| Temperature range | - 5 °C (41 °F) to 30 °C (86 °F). |
| Display | - Digital screen. - Display ambient temperature and heating level indicator (in continuous), setpoint temperature setting (on demand), fan-forced heater mode and keypad lock (when activated). |
| Other feature | - Choice of temperature display format (°C or °F). - Temperature setpoints recorded permanently in case of a power outage. - Ability to set minimum and maximum setpoints. |
| Installation | - 2-wire thermostat, easy to install. - Adapter plate for 347V junction box included. |
| Application | - Baseboard heater, radiant ceiling, radiant floor (without floor sensor), convactor (short cycle) and fan-forced convactor (long cycle). |
| Warranty | - 3-year warranty against defects. |

Model

| Product # | Description | Volts | Watts | Qty |
|-----------|---|---------|-----------|-----|
| OTH5007 | Non programmable electronic proportional pulsing thermostat | 277/347 | 4000/5000 | |

Standard color is white.

Specifications may change without prior notice

| | |
|-------------------------|-------------------------|
| Project: | Approval Information |
| Consultant Engineer: | |
| Electrician Contractor: | |
| Distributor: | |
| Date: | |
| Contact in Indeeco: | |
| Comments: | |