




STS
By Brasch



Discrete Radiant Heat

Research	01
Brasch Difference	02
Suitable Locations For Use	03
STS	04
STT Thin	05
Controls	06
What Do I Need?	07


Brasch has produced the best infrared heating element on the market. We manufacture elements perfectly suited for the comfort heat industry. Our tight wire construction, longevity, and selection separate us from the competition.



RESEARCH SHOWS STS HEATERS PRODUCE IDEAL COMFORT HEAT

The infrared or IR waveband is often subdivided into three regions: IR-A ($.7 - 1.4 \mu\text{m}$), IR-B ($1.4 - 3 \mu\text{m}$), and IR-C ($3 - 1000\mu\text{m}$). IR causes a heating effect when it strikes a surface, in the case of comfort heating this is normally the skin. However, not all IR is converted to heat. IR can be absorbed or reflected. In the comfort heating world, we want to fall into the absorption range as much as possible. Good absorption directly correlates to better comfort heat. Generally, the longer the IR wave, the more absorption will occur (IR-C) and the shorter the wave, the more IR is reflected off of the skin (IR-A & IR-B).

Brasch heating elements fall right in the sweet spot of the IR waveband, IR-C. Nearly 100% of the waves that the STS emits will be absorbed rather than reflected. Our competitors heating methods often land in the short-medium (IR-A and IR-B), which are ineffective for comfort heating applications. We're translating every penny you spend on energy into comfort heat rather than reflecting it around the room.

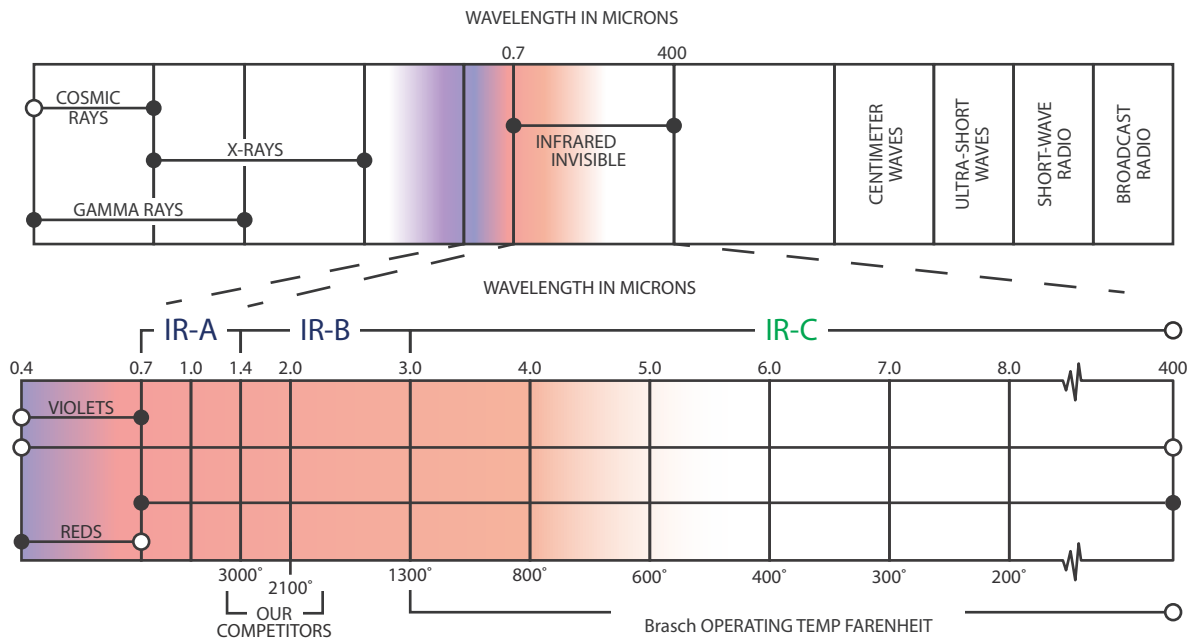

IR-A: SHORT WAVE

IR-B: MEDIUM WAVE

STS OPERATES HERE
IR-C: LONG WAVE

Lo

BRASCH



MADE IN THE USA

Proudly manufactured and hand
assembled in Missouri.




95% ENERGY EFFICIENT

Virtually all of the energy provided to
the heater is converted into useful
heat.



100% ELECTRIC

No flames or noxious gasses means
STS heaters are odor free and do not
require ventilation.




NO MOVING PARTS
Nothing to break or wear out
means the STS is maintenance
free.

NO ORANGE GLOW
Never worry about the eyesore of
a glowing heater again. Every STS
has a clean, black face which
does not give off any light,
meaning it neatly blends into the
background.

NO REFLECTORS TO CLEAN
No bulbs means no need for
reflectors. Another reason STS
heaters require zero
maintenance.

NO BULBS
Save yourself money and frustration
by never having to replace a bulb
bulb.

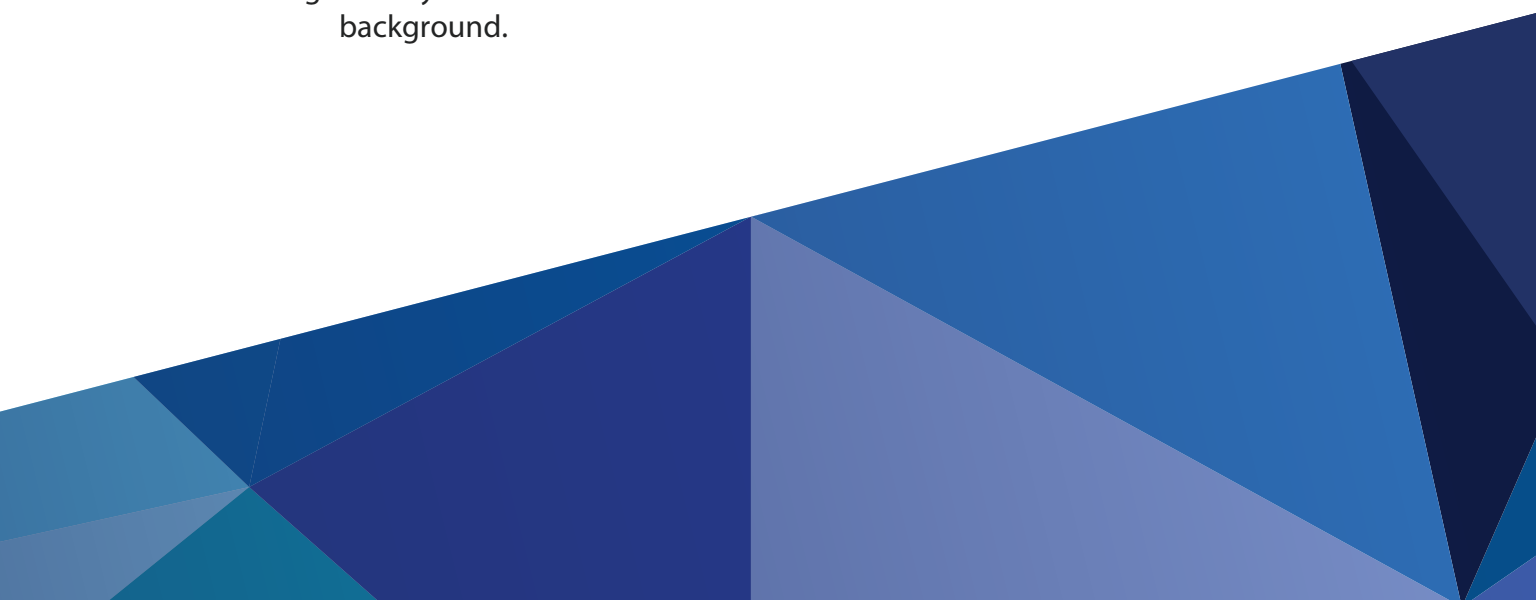

SUITABLE LOCATIONS FOR USE

Warehouses

Factories

Manufacturing Plants

Storage Facilities

Workshops and Garages

Autobody and Repair Shops

Fitness Studios

Hot Yoga

Ventilated Zoo and Animal Pens*

Ventilated Stables and Barns*

Transportation Terminals

Greenhouses

Airplane Hangers

Restaurants

Outdoor Patios

Water and other Treatment Facilities

Parking Garages

Indoor Pools

Hotel Entrances and Valet Stands

Stadiums and Arenas

Car Rental Stations


Retail Stores and Entry Foyers

Airports

Shipping and Receiving Docks

* STS and STT Thin are not rated for environments
requiring explosion proof certification

STS

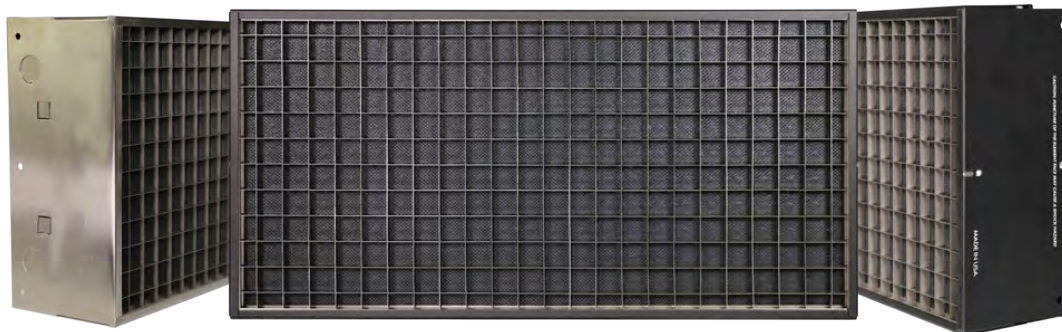

Shown with optional grid diffuser

Whether you have a warehouse, dock, or workshop to keep heated, STS is the smart choice. Let the quartz era end and a revolution begin with a zero maintenance heater. You'll never worry about bulbs to replace or reflectors to clean.

With no moving parts to wear out, STS will last you for years to come, all the while giving you safe, clean, energy-efficient heat. There are no combustion products discharged, no flames, and no noxious gases emitted. Meaning there is no need to ventilate.

To top it all off, STS provides the most energy efficient heater in the comfort heat market, converting 95% of the used energy into useful heat.

Optional stainless steel grid diffuser with 1" x 1" grid pattern helps control stray IR waves and directs them in a more uniform direction. The grid also creates small air pockets, which acts to insulate the face of the heater, thereby increasing the efficiency of the heater in drafty conditions.



95% ENERGY



EFFICIENT


ORDER YOUR STS IN ANY OF OUR HIGH TEMP RESISTANT COLOR OPTIONS

STAINLESS STEEL (SS)

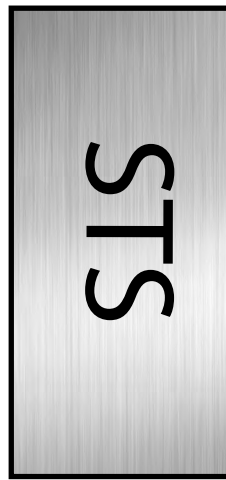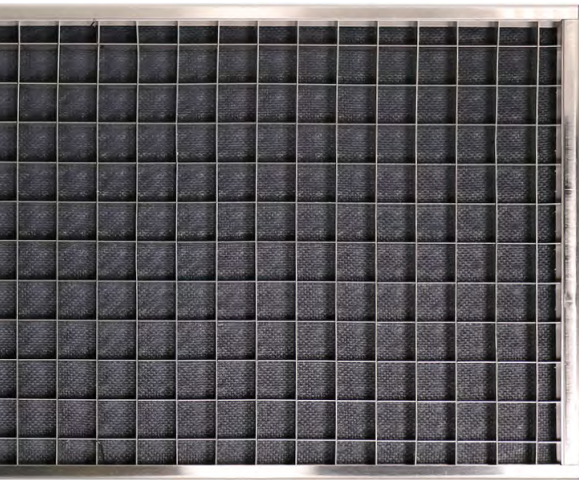


Shown with optional grid diffuser

BLACK SATIN (BK Standard)

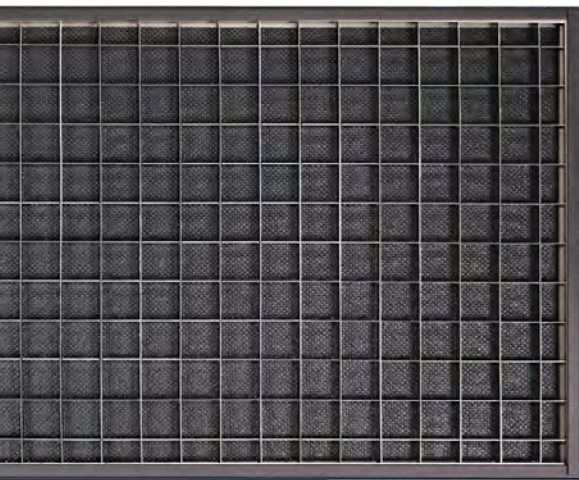

WHITE (W)




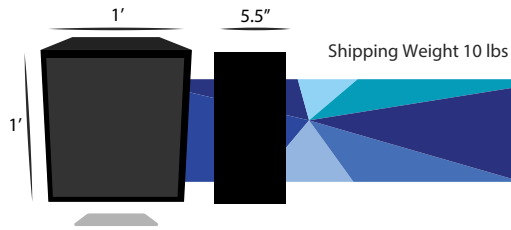

12" MODEL

SINGLE PHASE

MODEL	BTUs*	WATTS	120v	240v
BH-ST5-U12-0871B	2972	871	7.3	--
BH-ST5-U12-1081B	3707	1081	9.0	--
BH-ST5-U12-1111B	3789	1111	9.3	--
BH-ST5-U12-1681B	5927	1681	14.2	--
BH-ST5-U12-1436J	5573	1436	6.8	--

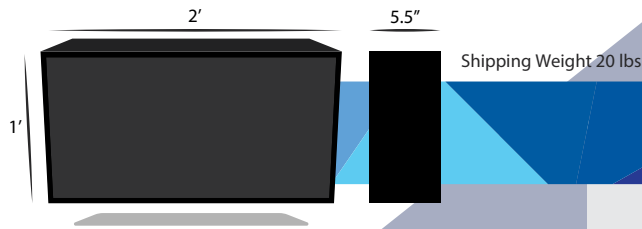

24" MODEL

SINGLE PHASE

THREE PHASE


MODEL	BTUs*	WATTS	120v	208v	240v	240v
BH-ST5-U24-1015V	3559	1015/783	--	3.8	4.3	--
BH-ST5-U24-1316B	4490	1316	11.0	--	--	--
BH-ST5-U24-1297V	4426	1297/974	--	4.7	5.4	--
BH-ST5-U24-1659B	5662	1659	13.8	--	--	--
BH-ST5-U24-1701V	5804	1701/1278	--	6.1	7.1	--
BH-ST5-U24-2192B	7479	2192	18.3	--	--	--
BH-ST5-U24-2001V	6827	2001/1503	--	7.2	8.3	--
BH-ST5-U24-2222B	7578	2222	18.5	--	--	--
BH-ST5-U24-2428V	8285	2428/1824	--	8.8	10.2	--
BH-ST5-U24-3363B	11614	3363	28.4	--	--	--
BH-ST5-U24-3239V	11052	3239/2433	--	11.7	13.5	--
BH-ST5-U24-1992P	6811	1992	--	--	--	4.8
BH-ST5-U24-2442P	8351	2442	--	--	--	5.9
BH-ST5-U24-3041P	10400	3041	--	--	--	7.3

Standard color - add BK for black satin finish to the end of the catalog number.

Optional color - add W for white finish or SS for stainless steel to the end of catalog number.

Optional Grid Diffuser - add code G to end of catalog number.

*BTUs shown is based on maximum wattage.

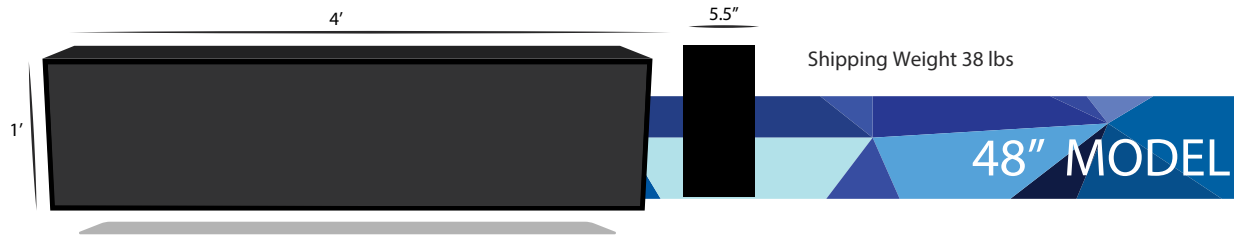

MODEL	BTUs*	WATTS	SINGLE PHASE					THREE PHASE	
			120v	208v	240v	277v	480v	240v	480v
BH-ST5-U48-2030T	7118	2030	--	--	--	--	4.3	--	--
BH-ST5-U48-2030V	7118	2030/1567	--	7.5	8.7	--	--	--	--
BH-ST5-U48-2594T	8851	2594	--	--	--	--	5.4	--	--
BH-ST5-U48-2594V	8851	2594/1948	--	9.4	10.8	--	--	--	--
BH-ST5-U48-3402T	11608	3402	--	--	--	--	7.1	--	--
BH-ST5-U48-3402V	11608	3402/2555	--	12.3	14.2	--	--	--	--
BH-ST5-U48-4002T	13654	4002	--	--	--	--	8.3	--	--
BH-ST5-U48-4002V	13654	4002/3006	--	14.5	16.7	--	--	--	--
BH-ST5-U48-3964N	13526	3964	--	--	--	14.3	--	--	--
BH-ST5-U48-4856T	16570	4856	--	--	--	--	10.1	--	--
BH-ST5-U48-4856V	16570	4856/3647	--	17.5	20.2	--	--	--	--
BH-ST5-U48-4776N	16296	4776	--	--	--	17.2	--	--	--
BH-ST5-U48-6478T	22104	6478	--	--	--	--	13.5	--	--
BH-ST5-U48-6478V	22104	6478/4866	--	23.4	27.0	--	--	--	--
BH-ST5-U48-6056N	20516	6056	--	--	--	21.7	--	--	--
BH-ST5-U48-3971P	13582	3971	--	--	--	--	--	9.6	--
BH-ST5-U48-3928U	13803	3928	--	--	--	--	--	--	4.9
BH-ST5-U48-4794P	16396	4797	--	--	--	--	--	11.6	--
BH-ST5-U48-4838U	16545	4838	--	--	--	--	--	--	5.8
BH-ST5-U48-5954P	20933	5954	--	--	--	--	--	14.8	--
BH-ST5-U48-6060U	20729	6060	--	--	--	--	--	--	7.3

Standard color - add BK for black satin finish to the end of the catalog number.

Optional color - add W for white finish or SS for stainless steel to the end of catalog number.

Optional Grid Diffuser - add code G to end of catalog number.

*BTUs shown is based on maximum wattage.



STT

THIN SERIES



STT Thin includes all of the features and benefits of the STS, in a new, slimmer, modern design. Packed with more heat per square inch, the STT Thin is still perfect for all of your heating needs. Ideal for restaurants, outdoor patios, and any other area that needs to keep people warm, the STT Thin does so effectively and discretely.

Like its sister heater, the STT Thin converts 95% of applied energy to useful heat, it contains no bulbs or moving parts to replace, and is maintenance free for the life of the heater. The slim cove design gives STT Thin an attractive commercial or residential appeal, and with three colors to choose from, these heaters blend seamlessly into any space.




CUSTOMIZE YOUR STT THIN WITH AN ATTRACTIVE COLOR OPTION




BLACK SATIN (BK Standard)



STAINLESS (SS)

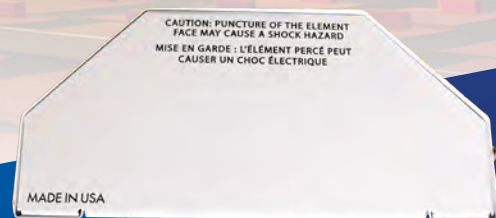

WHITE (W)

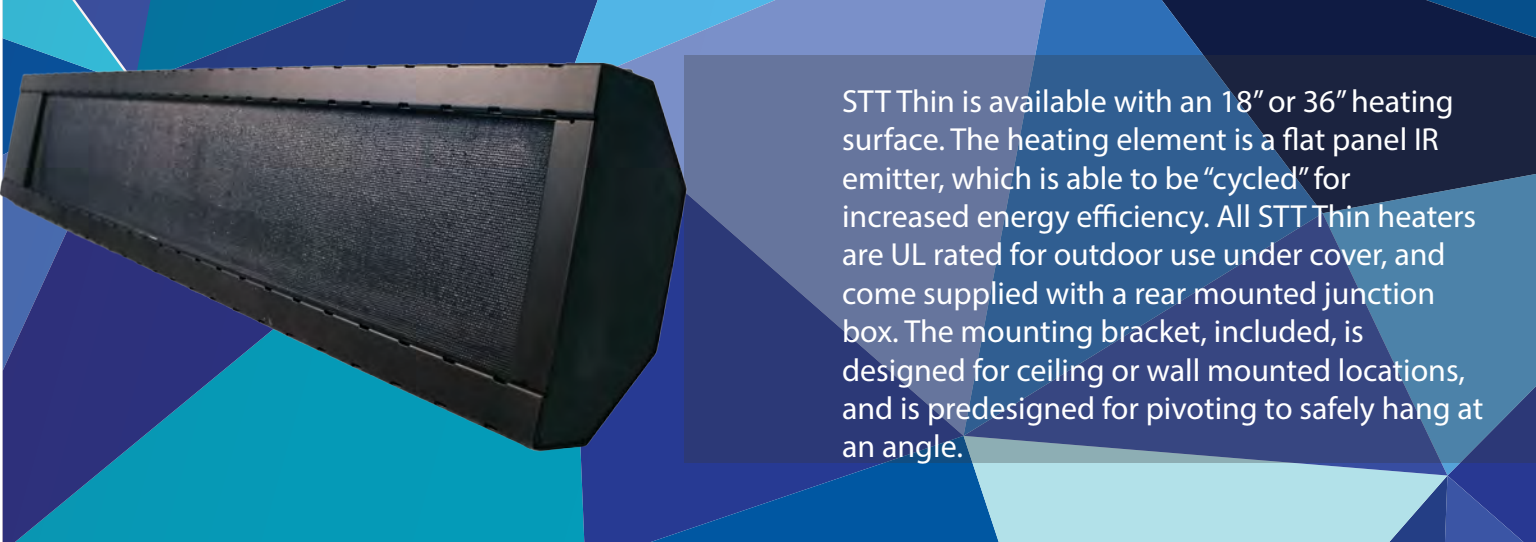

STT Thin is available with an 18" or 36" heating surface. The heating element is a flat panel IR emitter, which is able to be "cycled" for increased energy efficiency. All STT Thin heaters are UL rated for outdoor use under cover, and come supplied with a rear mounted junction box. The mounting bracket, included, is designed for ceiling or wall mounted locations, and is predesigned for pivoting to safely hang at an angle.

18" MODEL

3.8"

23.5"

8.85"

SINGLE PHASE			
MODEL	BTUs*	WATTs	120v
BH-STT-U18-1091B	3723	1091	9.1
BH-STTU18-1330B	4712	1330	11.5
BH-STT-U18-1767B	6053	1767	14.8
BH-STT-U18-2161B	7373	2161	18.1

Shipping Weight 16 lbs

36" MODEL

3.8"

41.5"

8.85"

SINGLE PHASE				
MODEL	BTUs*	WATTs	208v	240v
BH-STT-U36-2180V	7438	2180/1635	6.8	9.1
BH-STT-U36-2660V	9421	2660/2071	8.6	11.5
BH-STT-U36-3104V	10591	3104/2328	9.7	12.9
BH-STT-U36-3534V	12106	3534/2661	11.1	14.8
BH-STT-U36-4322	14747	4322/3242	13.6	18.1

Shipping Weight 21lbs

Standard color - add BK for black satin finish to the end of the catalog number.
Optional color - add W for white finish or SS for stainless steel to the end of catalog number.
*BTUs shown is based on maximum wattage.

CONTROLS

All STS and STT Thin heater models are capable of being regulated or “cycled” to control their heat output. Different methods of control offer varying levels of efficiency so each application should be examined to determine which control method is most suitable. The following pages discuss the Brasch recommended methods of control in more detail, highlighting the benefits and function of each.

STS and STT Thin heaters do not come with built in controls. The heaters may be installed and operated without controls, in which case a heater is either 100% on, or it is 100% off. This may be acceptable in many applications; however, when controls are needed to regulate temperature or follow a heating schedule, Brasch offers a variety of manufacturer recommended control options which range from single unit control, all the way to full system commercial and industrial grade control panels. Please contact your STS supplier or a qualified electrician to determine if controls are needed for your heating application.

What is “Cycling” – Cycling your heater is a method to control the temperature by repeatedly turning the heater on and off in a given period of time. Brasch flat panel IR emitters are capable of producing heat even when they are “off” for short periods of time, so in a comfort heat application, there is no noticeable loss of temperature. This does not harm the heater what-so-ever, and in fact, Brasch uses this as a method of highly efficient energy control in many applications.

EASILY CONTROLLED WITH YOUR SMART PHONE

1.



Set up your Z-Wave HUB in a centralized Location.

Link your phone and all of the TZ Switches you plan to use.

2.





Set up all of your TZ Switches.

Each TZ Switch can control up to 40 Amps, so multiple STS or STT Thin heaters can be attached to one TZ Switch.


3.



With your Z-Wave HUB set up and your TZ Switches all connected, you can now control your STS and STT Thin heaters from your phone. Easily create a routine for your heaters to turn on or off automatically, or enjoy turning them on and off as needed from the convenience of your phone.

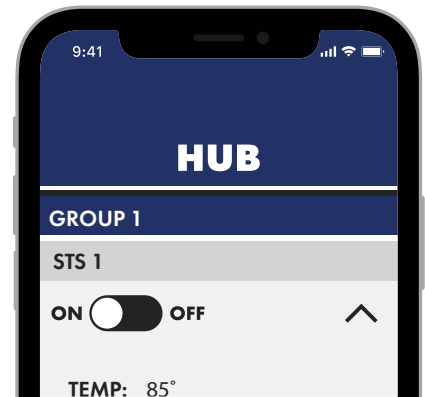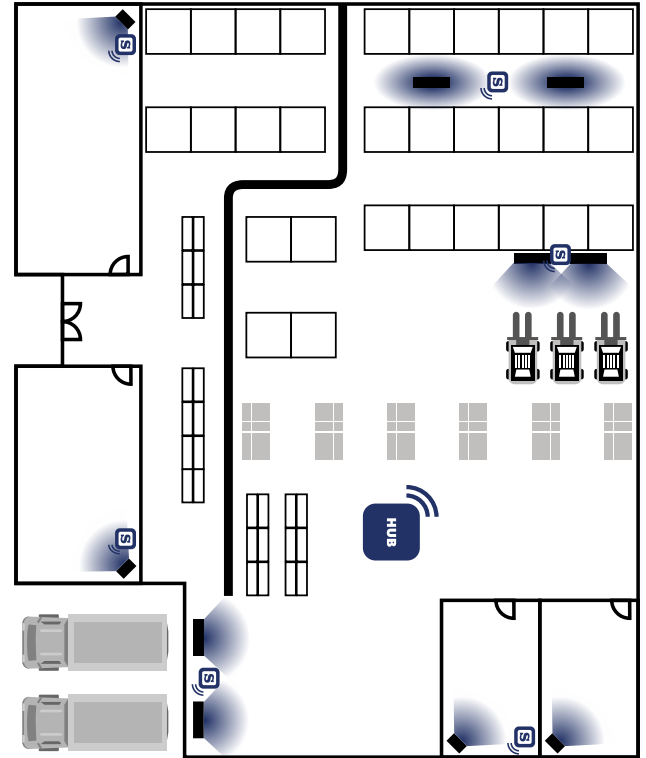

CONTROL PANEL

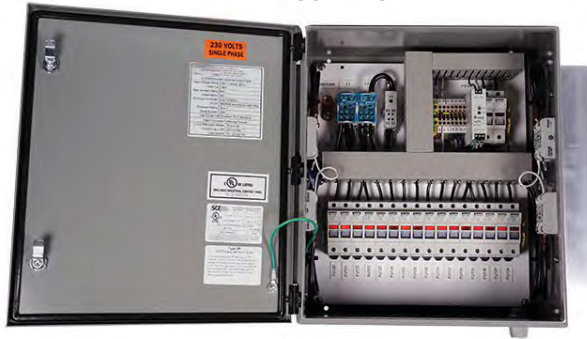

Brasch offers a variety of UL listed control panels as the most efficient and effective way to control your STS and STT Thin™ heaters. Suitable for 120V/240V and 480V heaters in both single and three phase design. Standard panels are equipped to handle up to 4 independently controlled heat zones. See below for a list of standard Brasch control panel options.

Contact you local sales representative for assistance in sizing your panel.

We will need the following information to size your panel:

- Number of heating zones
- Which model number and the quantity of each heater per zone
- Voltage/phase
- How do you want to control the heaters (built-in or remote color touch screen (specify), line voltage potentiometer on the panel door, or remote low voltage thermostat)

TOUCH SCREEN



Brasch's remote mounted Touch Screen allows users to access control of the heaters at a convenient location. A 4" color screen allows access to each zone for independent temperature control. All Brasch remote mounted touch screens are rated for indoor or outdoor use.

PERCENT TIMER



This 120V/240V 20 Amp Percent Timer offers simple control utilizing Brasc preferred method of “cycling” to regulate heater output. The simple operation of this Percentage Timer makes this unit ideal for regulating your STS and STT Thin heaters. Two dials give the user complete control of the heat output; one controls the cycle time of the heater, and the other controls the amount of time in which the heater is on during that given cycle. For example, if the cycle time is set to 1 minute, and the percent set to 75%; then the heater will be on for 45 seconds, off for 15 seconds, then repeat. This allows precise temperature control while offering optimal heater efficiency. This method of heat control is ideal for areas that need to regulate a consistent temperature.

TIMER



This 120V/240V 20 Amp In-Wall Timer gives the user precise control over the length of time a heater is on. Simply turn the dial to the desired time and it will be on for this period. At the end of this set time period, the heater will automatically shut off. This method of control is ideal for areas that are used frequently, but not for extended periods of time.


Z-WAVE

MODEL	ITEM DESCRIPTION	R A T I N G		
		AMP	VOLT	PHASE
BH-TZ-HUB	Wireless Connection Hub	ANY	ANY	1
BH-TZ-SWITCH	Wireless Controller, Z-WAVE Switch	40	120/240	1

UNIT CONTROLS

MODEL	ITEM DESCRIPTION	R A T I N G		
		AMP	VOLT	PHASE
BH-TZ-PCT	Percent Timer	20	120/240	1
BH-TZ-TIMER	Heavy Duty Timer	28	120/240	1

HOW TO DETERMINE THE NUMBER OF HEATERS YOU WILL NEED



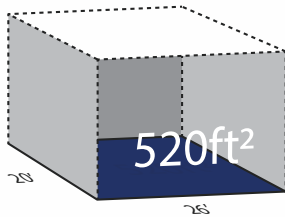


FIRST.

You will need to find the approximate square footage of the area you wish to heat.

SECOND.

Now that you know how large your space is, use this watts per square foot chart and reference the desired temperature rise. This will help determine the kW that is required to heat your space.

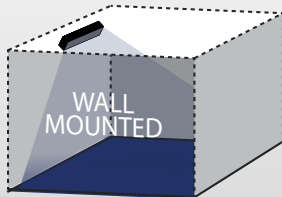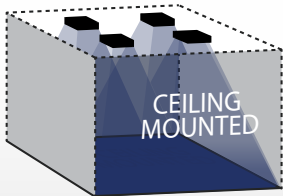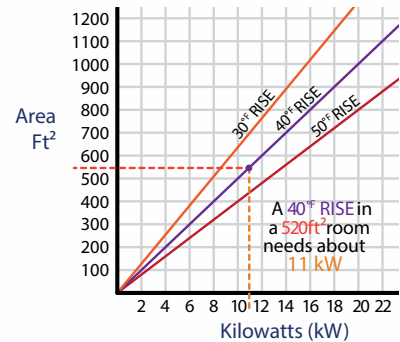


THIRD.


After determining the total kW needed for your space, visit the product portion of this catalog to select appropriately sized heaters for your space; keeping in mind voltage, phase, and wattage suitable for your needs. When determining the heater model and quantity that you need for your space, note that both STS and STT Thin can be ceiling or wall mounted. To achieve even heat distribution, we recommend smaller, more evenly spaced heaters throughout your space.

FOURTH.

If heat control is needed for your area, reference the controls section of this catalog to determine what the best method of heat control is for your area. Note that not all heating control options mentioned in this catalog are suitable for every heater.

For more information on heater requirements or controls, contact your local distributor or call Brasch directly to speak with a comfort heat professional.

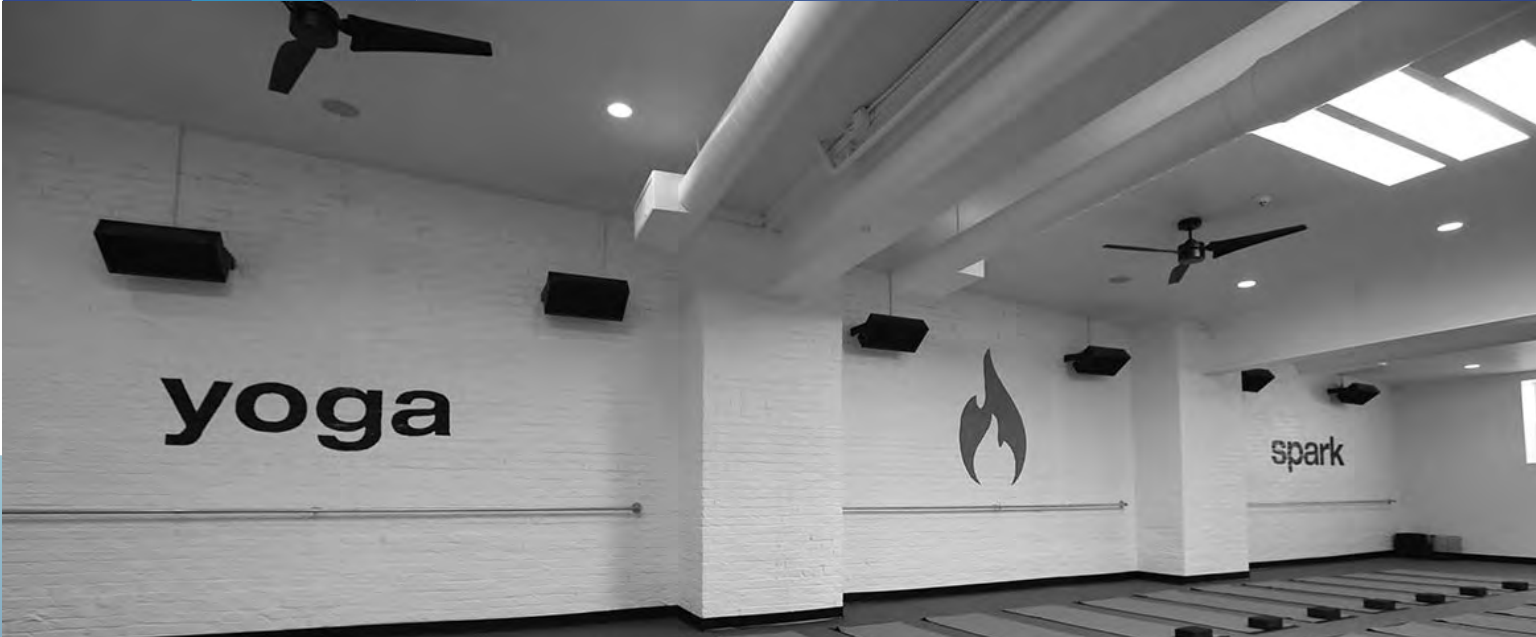

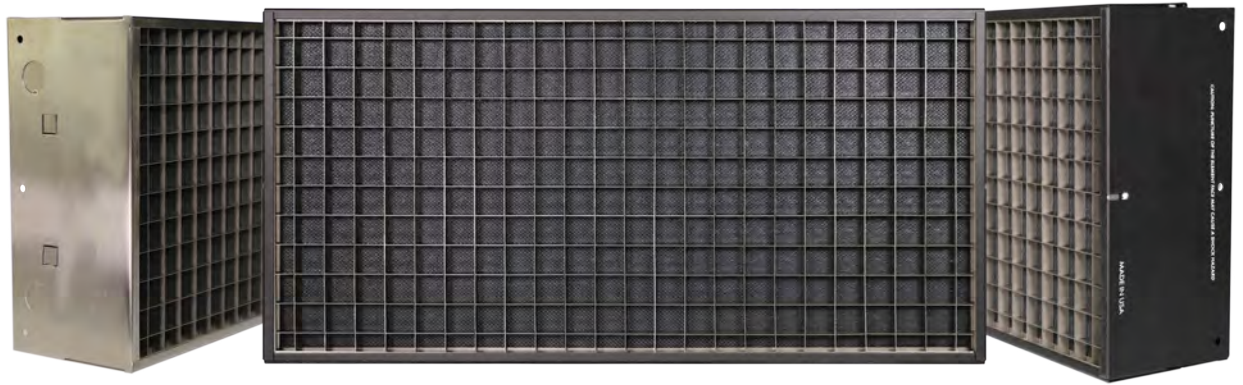

Shown with optional grid diffuser

WE REACH EVERY CORNER
OF THE GLOBE.

Now that you see what we're capable of, visit us online or
contact Brasch directly to speak with a member of our team.

www.Braschmfg.com

1-888-731-7010

BRASCH

www.Braschmfg.com

425 Hanley Industrial Ct.
St. Louis, MO 63144
1-888-731-7010

MKL - 3346 - 04